

optionally:  
transducer  
" Door closed "

stainless steel frame

Certification sign

stainless steel  
door hinged  
with thread-top

optionally:  
KAEFER- sign

optionally:  
OTS TS 93 B


optionally:  
Heater line  
for lock heating  
with freezing area


doorhandle

door leaf

stainless steel threshold

DIN right dilatory represented  
DIN left dilatory mirror - image

	date	name	designation:	project:
processed	04.11.2005	Qu	DA 60-Hinghdoor Standard (view)	
modified	05.12.2007	Be		
KAEFER			 <b>KAEFER</b>	page 1 / 4
scale: without		drawing no.: DA60-Info.dwg		BI

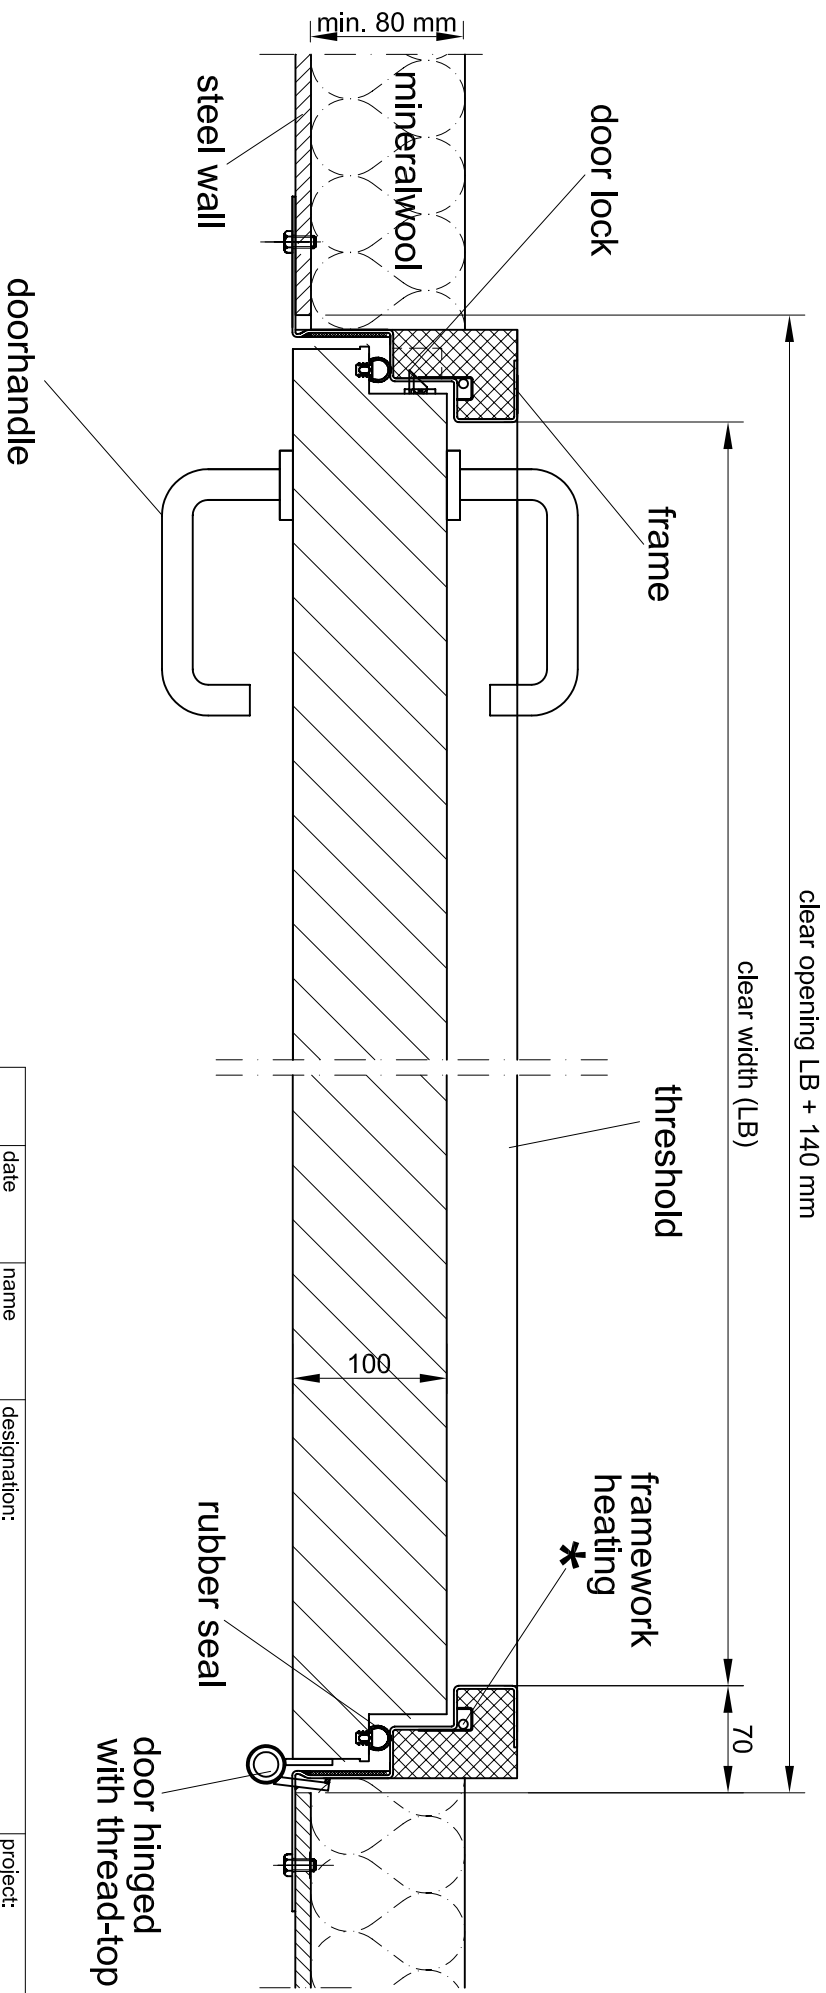

\* optionally accessories

date	name	designation:	project:
processed 04.11.2005	Qu	DA 60-Hinghdoor Standard (horizontal cut)	
modified 10.12.2007	Be		

KAEFFER



**KAEFFER**

page  
2 / 4


BI

scale: without


drawing no.:

DA60-Info.dwg



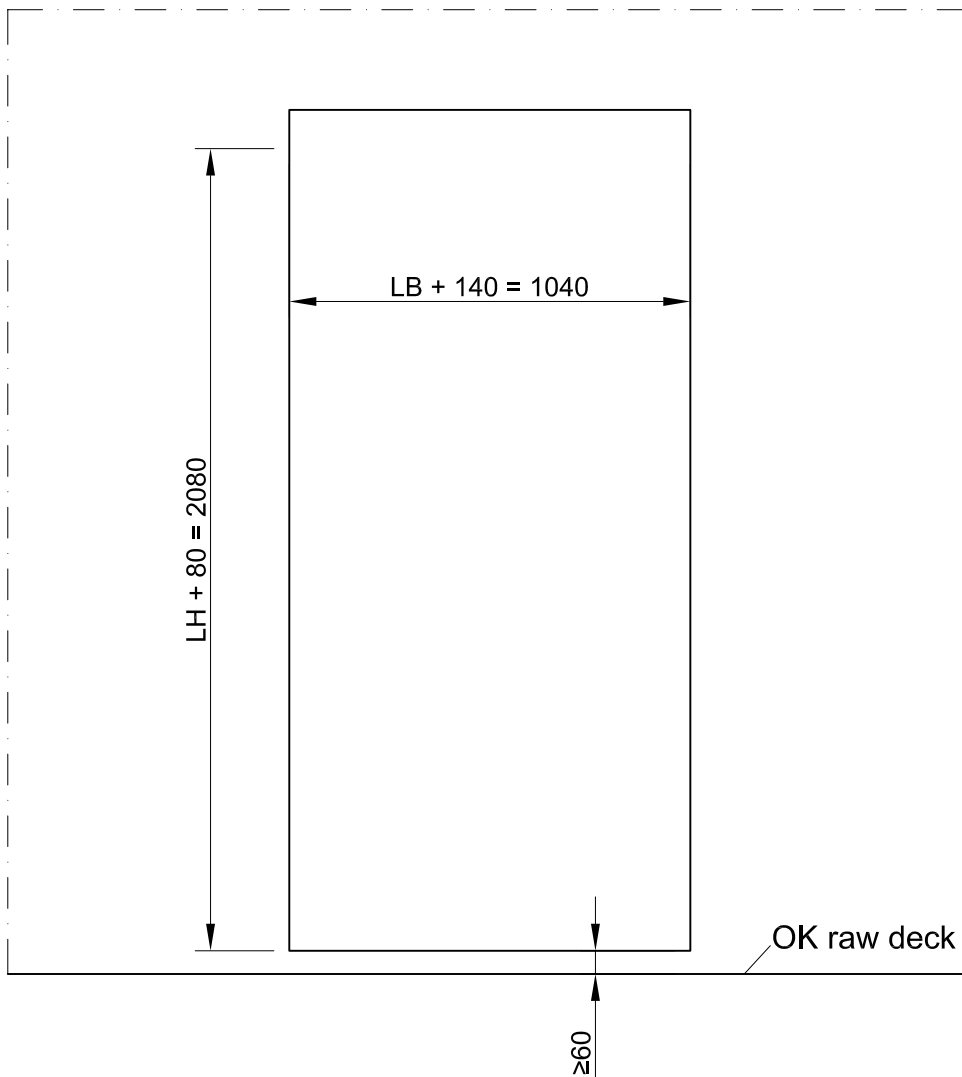

Example:  $LB \times LH = 900 \times 2000$   
 cutout:  $LB + 140 = 1040$   
 $LH + 80 = 2080$

	date	name	designation:	project:
processed	04.11.2005	Qu	DA 60-Hinghdoor Standard ( cut-out )	
modified	05.12.2007	Be		
KAEFER			 <b>KAEFER</b>	page 4 / 4
scale: without		drawing no.: DA60-Info.dwg		BI